

UNCLASSIFIED

AD NUMBER

AD805280

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors;  
Administrative/Operational Use; SEP 1966. Other requests shall be referred to Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH 45433.

AUTHORITY

AFFDL ltr 29 Dec 1971

THIS PAGE IS UNCLASSIFIED

AFFDL-TR-66-43  
PART XV

805280

## **AIRCRAFT GROUND-FLOTATION INVESTIGATION**

### **PART XV — DATA REPORT ON TEST SECTION 14A**

*J. WATKINS and G. HAMMITT II*

*U. S. ARMY ENGINEER WATERWAYS EXPERIMENT STATION*

**TECHNICAL REPORT AFFDL-TR-66-43, PART XV**

**SEPTEMBER 1966**

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFM), Wright-Patterson AFB, Ohio 45433.

**AIR FORCE FLIGHT DYNAMICS LABORATORY  
RESEARCH AND TECHNOLOGY DIVISION  
AIR FORCE SYSTEMS COMMAND  
WRIGHT-PATTERSON AIR FORCE BASE, OHIO**

## NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Copies of this report should not be returned to the Research and Technology Division unless return is required by security considerations, contractual obligations, or notice on a specific document.

# **AIRCRAFT GROUND-FLOTATION INVESTIGATION**

## **PART XV — DATA REPORT ON TEST SECTION 14A**

*J. WATKINS and G. HAMMITT II*

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFM), Wright-Patterson AFB, Ohio 45433.

## FOREWORD

The investigation described herein constitutes one phase of studies conducted during 1964 and 1965 at the U. S. Army Engineer Waterways Experiment Station (WES) under U. S. Air Force Project No. 410-A, MIPR No. AS-4-177, "Development of Landing Gear Design Criteria for the CX-HLS Aircraft." (The CX-HLS is now designated C-5A.) This program was sponsored and directed by the Landing Gear Group, Air Force Flight Dynamics Laboratory, Research and Technology Division, Mr. R. J. Parker, Project Engineer.

These tests were conducted by personnel of the WES Flexible Pavement Branch, Soils Division, under the general supervision of Messrs. W. J. Turnbull, A. A. Maxwell, and R. G. Ahlvin, and the direct supervision of Mr. D. N. Brown. Other personnel actively engaged in this study were Messrs. C. D. Burns, D. M. Ladd, H. H. Ulery, Jr., J. E. Watkins, G. M. Hammitt II, and W. J. Hill, Jr. This report was prepared by Messrs. Watkins and Hammitt.

Directors of WES during the conduct of this investigation and preparation of this report were Col. Alex G. Sutton, Jr., CE, and Col. John R. Oswalt, Jr., CE. Technical Director was Mr. J. B. Tiffany.

Publication of this technical documentary report does not constitute Air Force approval of the report's findings or conclusions. It is published only for the exchange and stimulation of ideas.



KENNERLY H. DIGGES  
Chief, Mechanical Branch  
Vehicle Equipment Division  
AF Flight Dynamics Laboratory

### ABSTRACT

This data report describes work undertaken as part of an overall program to develop ground-flotation criteria for the C-5A aircraft. A test section was constructed to a width adequate for two test lanes. Each lane was divided into two items having different subgrade CBR values; both lanes were unsurfaced. Traffic was applied to both lanes using a 25,000-lb load on a single-wheel assembly, and an inflation pressure of 250 psi. The two tires originally selected for these tests were a 30x11.5, 24-ply aircraft tire and a 20x20, 22-ply aircraft tire. However, because of the extreme overinflation of the 20x20 tire, tire failure occurred after 1 pass of the load vehicle, and the tests were completed using a 56x16, 32-ply aircraft tire.

This report presents the data collected on soil strengths, and surface deformations and deflections. The traffic-coverage level at which failure occurred on each test item is also given.

## CONTENTS

	<u>Page</u>
SECTION I: INTRODUCTION . . . . .	1
SECTION II: DESCRIPTION OF TEST SECTION AND LOAD VEHICLES . . . . .	2
Description of Test Section . . . . .	2
Load Vehicles . . . . .	2
SECTION III: APPLICATION OF TRAFFIC, FAILURE CRITERIA, AND DATA COLLECTED . . . . .	3
Application of Traffic . . . . .	3
Failure Criteria and Data Collected . . . . .	3
SECTION IV: BEHAVIOR OF ITEMS UNDER TRAFFIC AND TEST RESULTS . . . . .	5
Lane 32 . . . . .	5
Lane 32A . . . . .	6
Comparison of Ruts . . . . .	7
SECTION V: PRINCIPAL FINDINGS . . . . .	8

## ILLUSTRATIONS AND TABLES

<u>Figure</u>	<u>Page</u>
1. Traffic distribution pattern	3
2. Test load vehicle, lane 32	11
3. Test load vehicle, lane 32A	12
4. Lane 32, items 2 and 3, prior to traffic	13
5. Lane 32, item 2, after 1 pass (failure)	14
6. Lane 32, item 3, after 1 pass	15
7. Lane 32, item 3, after 6 coverages (failure)	16
8. Lane 32A, items 2 and 3, prior to traffic	17
9. Lane 32A, item 2, after 10 coverages (failure)	18
10. Lane 32A, item 3, after 60 coverages (failure)	19
11. Rut depths resulting from different size tires (20x20, 22-ply tire and 30x11.5, 24-ply tire)	20
12. Rut depths resulting from different size tires (56x16, 32-ply tire and 30x11.5, 24-ply tire)	21
13. Layout of Test Section 14A and summary of test results	22
14. Tire-print dimensions and tire characteristics	23
15. Average cross-sectional deformations	24
16. Permanent profile deformations	25

<u>Table</u>	
1. Summary of Traffic Data, Test Section 14A	9
2. Summary of CBR, Density, and Water Content Data, Test Section 14A, Lanes 32 and 32A	10



## SUMMARY

Tests on Section 14A are one phase of a comprehensive research program to develop ground-flotation criteria for heavy cargo-type aircraft. Section 14A was laid out to accommodate two test lanes, lanes 32 and 32A, each of which was divided into two items having different subgrade CBR values. Both lanes were unsurfaced. Traffic was applied to both lanes using a 25,000-lb load on a single-wheel assembly, and an inflation pressure of 250 psi. The two tires originally selected for these tests were a 30x11.5, 24-ply aircraft tire and a 20x20, 22-ply aircraft tire. However, because of the extreme overinflation of the 20x20 tire, tire failure occurred after one pass of the load vehicle, and the tests were completed using a 56x16, 32-ply aircraft tire. Figure 14 gives pertinent tire-print dimensions and tire characteristics.

The lanes were trafficked to failure in accordance with the criteria designated in Part I of this report. Data were recorded throughout testing to give a behavior history of each item. Using the test criteria mentioned above, it was possible to directly compare the effects of trafficking with different size tires. Basic performance data are summarized in the following paragraphs.

### Lane 32

#### Item 2

The item was considered failed due to rutting at 1 pass of the load wheel. The rated CBR of the item was 10.0.

#### Item 3

The item was considered failed due to rutting at 6 coverages of the test load. The rated CBR of the item was 14.0.

Lane 32A

Item 2

The item was considered failed due to roughness at 10 coverages. The rated CBR of the item was 10.0.

Item 3

The item was considered failed due to roughness at 60 coverages. The rated CBR of the item was 14.0.

## AIRCRAFT GROUND-FLOTATION INVESTIGATION

### PART XV DATA REPORT ON TEST SECTION 14A

#### SECTION I: INTRODUCTION

The investigation reported herein is one phase of a comprehensive research program being conducted at the U. S. Army Engineer Waterways Experiment Station (WES), Vicksburg, Miss., as part of U. S. Air Force Project 410-A, MIPR No. AS-4-177, to develop ground-flotation criteria for the C-5A, a heavy cargo-type aircraft. Specifically, the tests reported herein are part of a series of tests to determine the degree of interaction of the wheels of multiple-wheel landing-gear assemblies on landing mat and unsurfaced soils under various conditions of loading.

Prosecution of this investigation consisted of constructing two similar traffic lanes and subjecting them to traffic of a single-wheel, 25,000-lb load with different tire sizes.

This report presents a description of the test section and gives results of traffic. Equipment used, types of data and method of recording them, and general test criteria are explained and illustrated in Part I of this report.

## SECTION II: DESCRIPTION OF TEST SECTION AND LOAD VEHICLES

### Description of Test Section

The test section (figure 13) was constructed within a roofed area in order to allow control of the subgrade CBR (California Bearing Ratio) in the test items. The test section was located on the same site as Test Section 14 and the surface of previously used items 2 and 3 of Section 14 was simply smoothed out for tests on this section. Item 1 of Section 14 was not reuseable. The fill material consisted of a heavy clay soil (buckshot; classified as CH according to the Unified Soil Classification System, MIL-STD-619). The fill material was a local clay with a plastic limit of 27, liquid limit of 58, and plasticity index of 31. Gradation and classification data for the subgrade material are given in Part I.

Two traffic lanes, each divided into two items, were constructed in the test section. The subgrade strengths used were those existing after smoothing out of Test Section 14. No attempt was made to construct a subgrade with a given CBR value. Both items 2 and 3 were unsurfaced.


### Load Vehicles

The load vehicles used for trafficking test lanes in Section 14A are shown in figures 2 and 3. Load-cart construction, details of linkage between the load compartment and prime mover, and methods of applying load are explained in Part I. For trafficking lanes 32 and 32A, a single-wheel assembly was used with a 25,000-lb load and an inflation pressure of 250 psi. A 30x11.5, 24-ply tire and a 56x16, 32-ply tire were used on lanes 32 and 32A, respectively. Tire-print data and pertinent tire characteristics are given in figure 14.

### SECTION III: APPLICATION OF TRAFFIC, FAILURE CRITERIA, AND DATA COLLECTED

#### Application of Traffic

Traffic was applied to the test lanes in a nonuniform pattern with intensity of traffic being varied within each lane to produce three zones of approximately 100, 80, and 20 percent traffic coverage. Traffic was distributed within a traffic lane to simulate as nearly as possible the bell-shaped traffic distribution curve which results from the wander of aircraft from the lane center line. The coverage levels referred to in the tables and text herein are the total number of coverages applied to the 100 percent coverage zone. The corresponding number of coverages applied to the outer traffic zones is proportional to the percentage factor for the respective zones, as shown in figure 1.

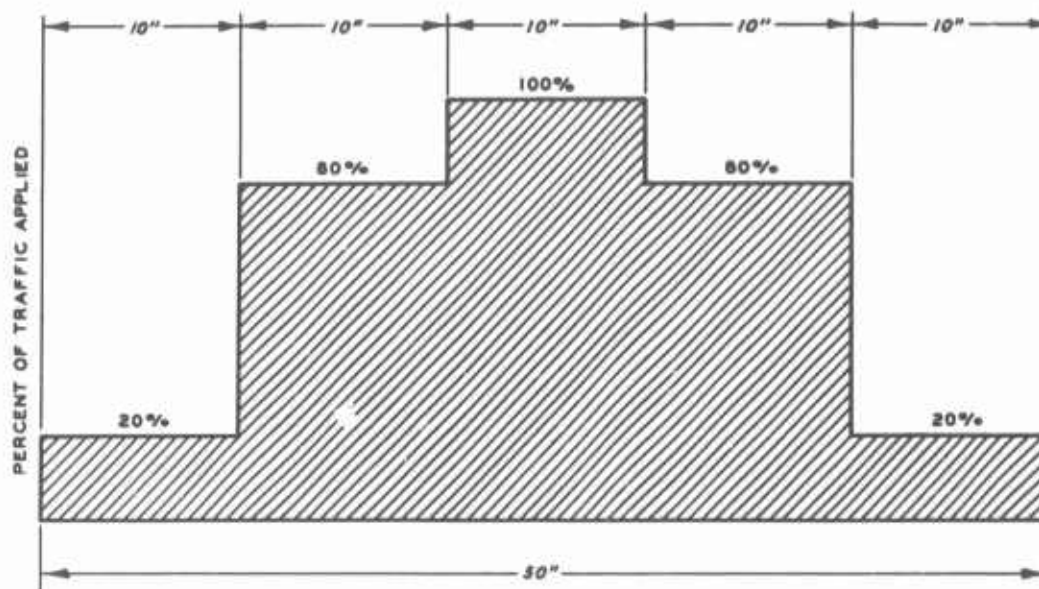

LANES 32 AND 32A

Figure 1. Traffic distribution pattern

#### Failure Criteria and Data Collected

Failure criteria used in this investigation and descriptive terms used in presentation and discussion of data in all parts in this report are presented in Part I. A general outline of types of data collected is given in the following paragraphs. Details on apparatus and procedure for obtaining specific measurements are given in Part I.

#### CBR, water content, and dry density

CBR, water content, and dry density of the subgrade were measured for each test item prior to application of traffic, at intermediate coverage levels, and at failure. After traffic was concluded on an item, a measure of subgrade strength termed "rated CBR" was determined. Rated CBR is generally the average CBR value obtained from all the determinations made in the top 12 in. of soil during the test life of an item. In certain instances, extreme or irregular values may be ignored if the analyst decides that they are not properly representative.

#### Surface roughness, or differential deformation

Surface roughness, or differential deformation, measurements and rut depth measurements were made using a 10-ft straightedge at various traffic-coverage levels on all items.

#### Deformations

Deformations, defined as permanent cumulative surface changes in cross section or profile of an item, were charted by means of level readings at pertinent traffic-coverage levels.

#### Deflection

Deflection of the test surface under an individual static load of the tracking assembly was measured at various traffic-coverage levels. Level readings on the item surface, on each side of the load wheels, and on a pin and cap device directly beneath a load wheel provided deflection data. Both total (for a single loading) and elastic (recoverable) deflections were measured.

## SECTION IV: BEHAVIOR OF ITEMS UNDER TRAFFIC AND TEST RESULTS

### Lane 32

#### Behavior of items under traffic

Item 2. Figure 4 shows item 2 prior to failure. The item was considered failed due to rutting after 1 pass of the load vehicle (figure 5). The rated CBR was 10.0.

Item 3. Figure 6 shows item 3 prior to failure. The item was considered failed due to rutting at 6 coverages (figure 7). The rated CBR was 14.0.

#### Test results

Traffic test results are summarized in table 1. Soil test data are shown in table 2.

Item 2. Item 2 was considered failed due to rutting after 1 pass. The following information was obtained from traffic tests on item 2.

- a. Roughness. The maximum and average rut depths in item 2 at failure were 5.75 and 4.78 in., respectively.
- b. Deformation. Figures 15 and 16 show cross-section and profile plots, respectively, for 1 pass of the test load. The maximum permanent deformation at failure measured 3.6 in.
- c. Deflection. Only pin and cap deflections were measured in these tests. At failure the maximum total deflection was 3.6 in. The elastic soil deflection at failure was 0.6 in.

Item 3. Item 3 was considered failed due to roughness at 6 coverages. The following information was obtained from traffic tests on item 3.

- a. Roughness. The maximum and average rut depths in item 3 at failure were 5.50 and 4.12 in., respectively.
- b. Deformation. Figures 15 and 16 show cross-section and profile plots, respectively, for 1 pass and 6 coverages of the test load. The maximum permanent soil deformation at failure was 2.2 in.
- c. Deflection. Only pin and cap deflections were measured in these tests. At failure the maximum total deflection was 1.4 in. Elastic deflection at failure measured 0.4 in.



## Lane 32A

### Behavior of items under traffic

Item 2. Figure 8 shows item 2 prior to traffic. The item was considered failed due to roughness at 10 coverages (figure 9). The rated CBR was 10.0.

Item 3. Figure 8 shows item 3 prior to traffic. The item was considered failed at 60 coverages (figure 10). The rated CBR for the item was 14.0.

### Test results

Traffic results are summarized in table 1. Soil test data are given in table 2.

Item 2. Item 2 was considered failed due to roughness at 10 coverages. The following information was obtained from traffic tests on item 2.

- a. Roughness. The average transverse and diagonal differential deformations at failure were 3.75 and 3.82 in., respectively. The maximum and average rut depths at failure measured 2.38 and 2.00 in., respectively.
- b. Deformation. Figures 15 and 16 show cross-section and profile plots, respectively, for 1 pass and 10 coverages of the test load. The maximum permanent soil deformation at failure was 2.3 in.
- c. Deflection. Only pin and cap deflections were measured in these tests. At failure the maximum total deflection was 0.70 in. Elastic deflection at failure was 0.50 in.

Item 3. Item 3 was considered failed due to roughness at 60 coverages. The following information was obtained from traffic tests on item 3.

- a. Roughness. The average transverse and diagonal differential deformations at failure were 3.87 and 4.31 in., respectively. The maximum and average rut depths were 2.88 and 2.25 in., respectively.
- b. Deformation. Figures 15 and 16 show cross-section and profile plots, respectively, for several traffic levels. The maximum permanent soil deformation at failure was 4.3 in.
- c. Deflections. Only pin and cap deflections were measured in these tests. At failure the maximum total deflection was 0.70 in. The elastic soil deflection at failure was 0.50 in.



### Comparison of Ruts

Figures 11 and 12 show rut depths resulting from different size tires. The three tires involved were a 20x20, 22-ply aircraft tire, a 30x11.5, 24-ply aircraft tire, and a 56x16, 32-ply aircraft tire.

## SECTION V: PRINCIPAL FINDINGS

From the foregoing discussion, the principal findings relating test load, wheel assembly, tire inflation pressure, subgrade CBR, and traffic coverages are as follows:

<u>Load, Wheel Assembly, and Tire Pressure</u>	<u>Test Item*</u>	<u>Rated Subgrade CBR</u>	<u>Coverages at Failure</u>
<u>Lane 32</u>			
25,000-lb load; single-wheel assembly; 30x11.5, 24-ply tires inflated to 250 psi	2	10.0	1 pass
	3	14.0	6
<u>Lane 32A</u>			
25,000-lb load; single-wheel assembly; 56x16, 32-ply tires inflated to 250 psi	2	10.0	10
	3	14.0	60

---

\* All items were unsurfaced.

Table 1

SUMMARY OF TRAFFIC DATA, TEST SECTION 14A

Test Item	Cover-ages	Rated CBR	Differential Deformation (in.)						Total and Elastic Deflection (in.)			Remarks	
			Longi-tudinal		Trans-verse		Diagonal		Rutting (in.)				
			Max	Avg	Max	Avg	Max	Avg	Max	Avg	Total		Elastic
Lane 32													
2	1 Pass	10.0	--	--	--	--	--	--	5.75	4.78	3.60	0.60	Failed at 1 pass
3	1 Pass	14.0	--	--	--	--	--	--	1.63	1.09	--	--	Failed at 6 coverages
	--		--	--	--	--	5.50	4.12	1.40	0.40			
Lane 32A													
2	1 Pass	10.0	--	--	--	--	--	--	1.38	1.16	--	--	Failed at 10 coverages
	10		0.50	0.31	4.13	3.75	4.25	3.82	2.38	2.00	0.70	0.50	
3	1 Pass		--	--	--	--	--	--	0.63	0.50	--	--	Failed at 60 coverages
	10	14.0	0.50	0.25	1.50	1.28	1.63	1.35	1.13	0.94	0.70	0.50	
	60		0.60	0.40	4.88	3.87	5.25	4.31	2.88	2.25	0.70	0.50	

Note: For lane 32, a single-wheel assembly with a 30x11.5, 24-ply tire inflated to 250 psi was used for trafficking. For lane 32A, a single-wheel assembly with a 56x16, 32-ply tire inflated to 250 psi was used for trafficking. A 25-kip load was used on both assemblies.

TABLE 2

SUMMARY OF CBR, DENSITY, AND WATER CONTENT DATA,  
TEST SECTION 14A, LANES 32 AND 32A\*

Test Item**	Coverages	Depth (in.)	CBR	Water Content (%)	Dry Density (lb/cu ft)	Remarks
2	0	0	0	26.0	97.1	
		6	10	25.6	96.2	
		12	10	27.9	93.9	
2	0	0	9	26.6	96.7	
		6	10	25.5	96.8	
		12	11	26.2	94.7	
2	1 Pass	0	9	26.2	96.9	
		6	9	23.1	95.8	
		12	9	23.9	94.7	
3	0	0	15	23.5	100.5	
		6	16	23.1	100.1	
		12	12	23.9	96.6	
3	6	0	15	23.6	102.5	Data taken inside traffic lane
		6	15	23.4	99.6	
		12	14	23.8	100.0	
3	6	0	15	23.4	98.8	Data taken outside traffic lane
		6	14	24.6	96.8	
		12	15	23.6	98.9	

Note: Subgrade material was a heavy clay (buckshot; classified as CH) in all items.

\* Test lanes 32 and 32A as constructed were extra narrow and close together. Therefore, the data obtained for lane 32 is considered applicable to lane 32A. No failure data were obtained for lane 32A.

\*\* All items were unsurfaced.

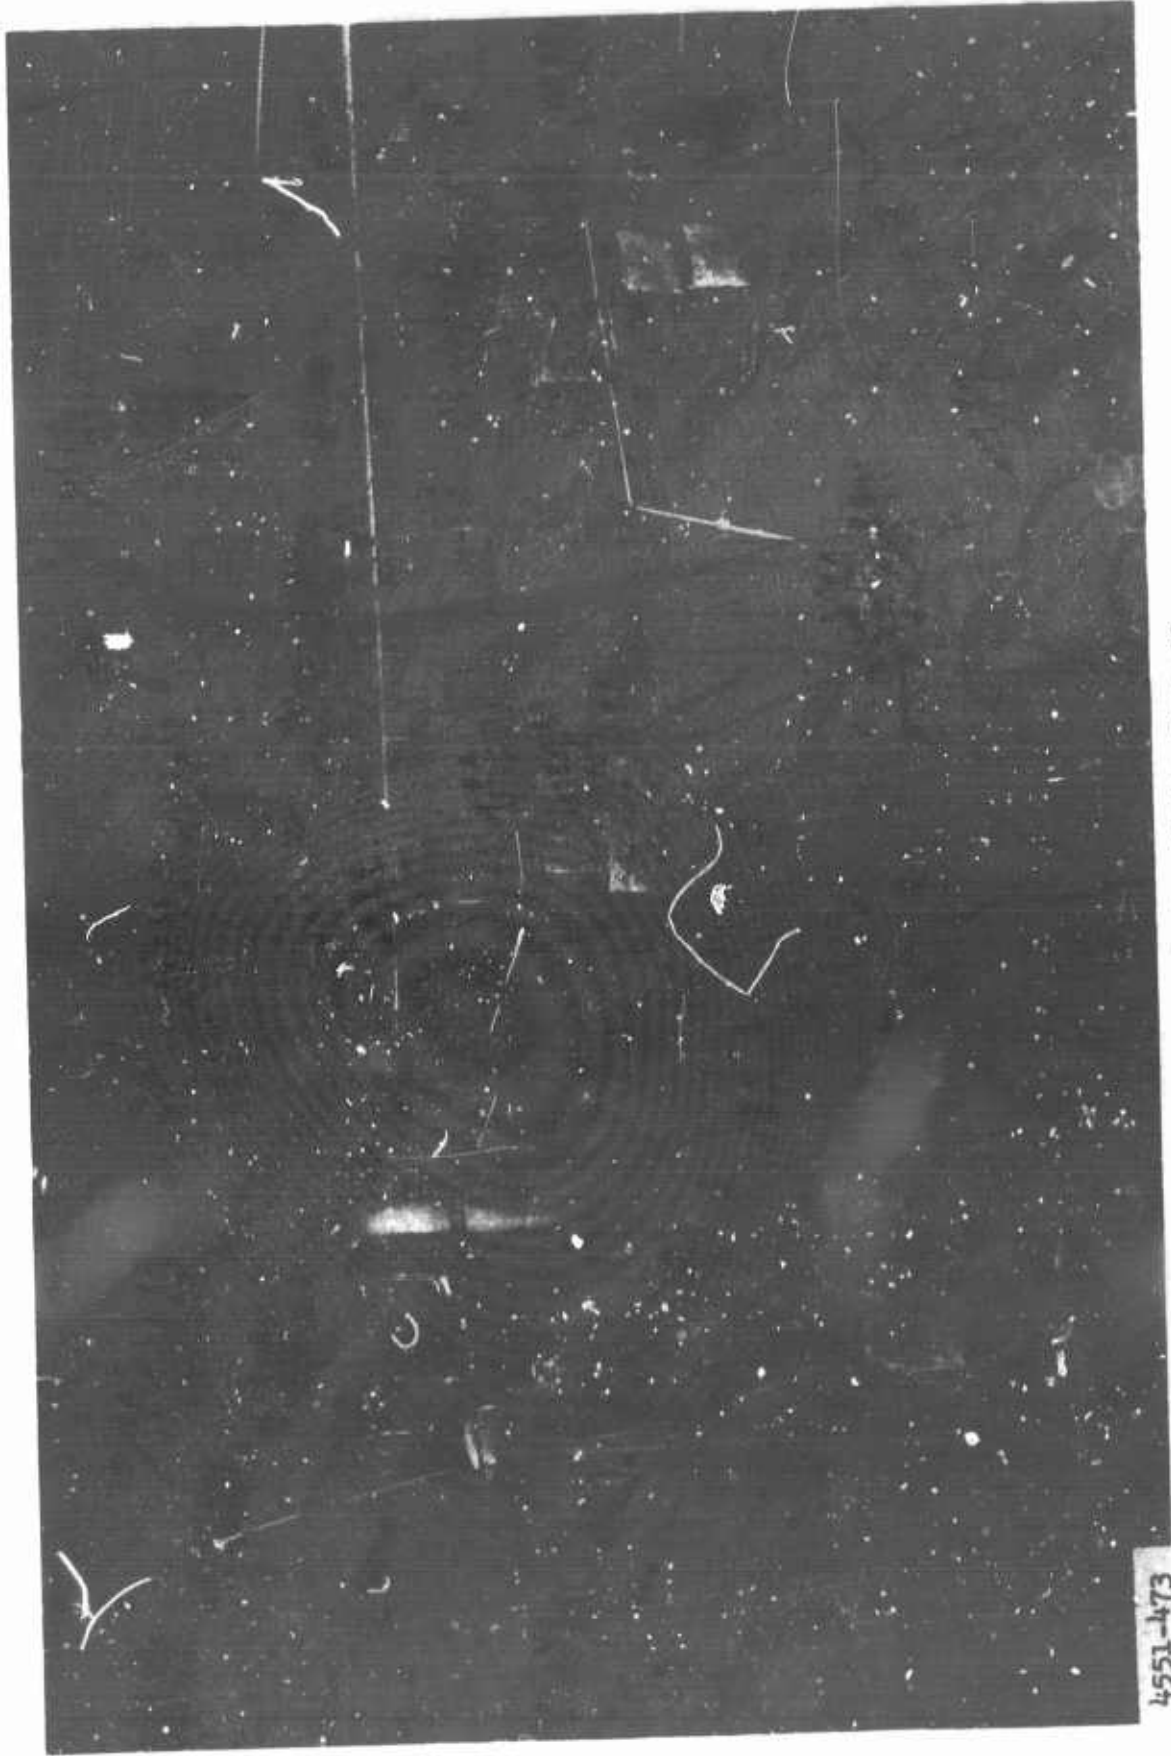


Figure 2. Test load vehicle, lane 32

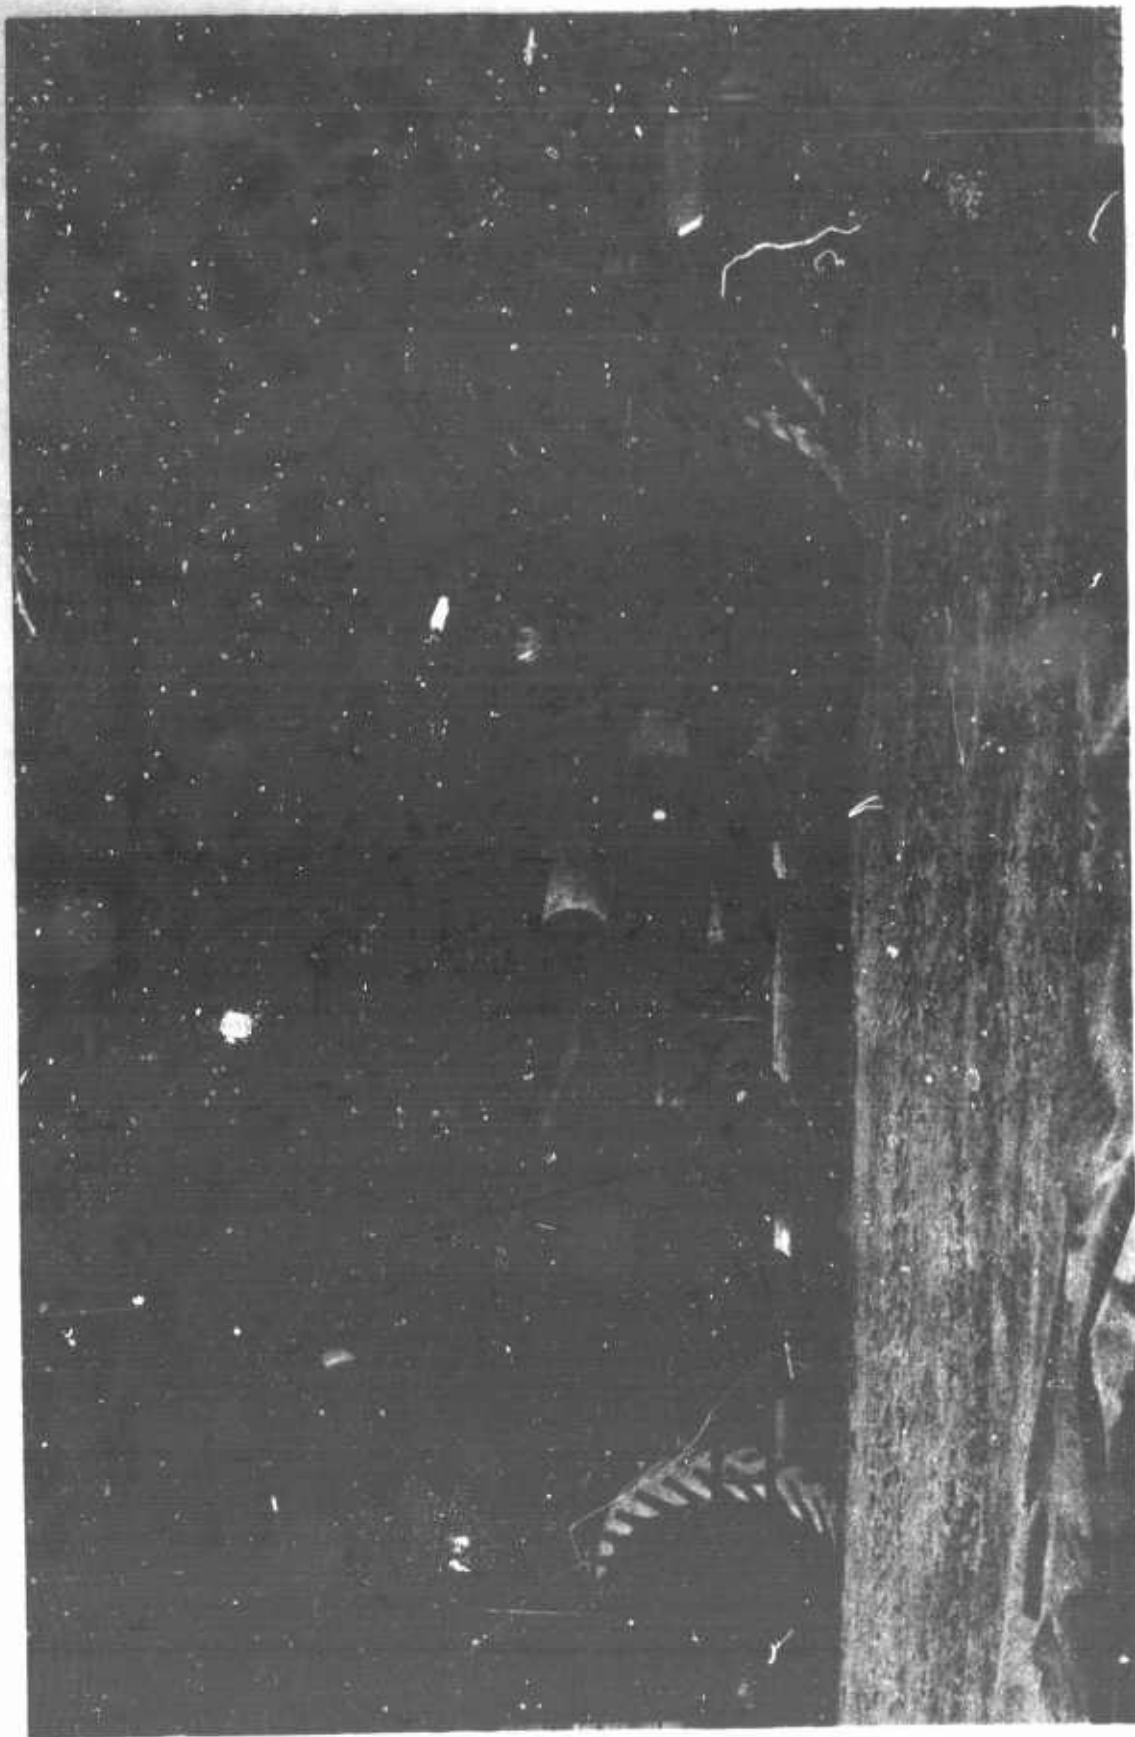


Figure 3. Test load vehicle, lane 32A



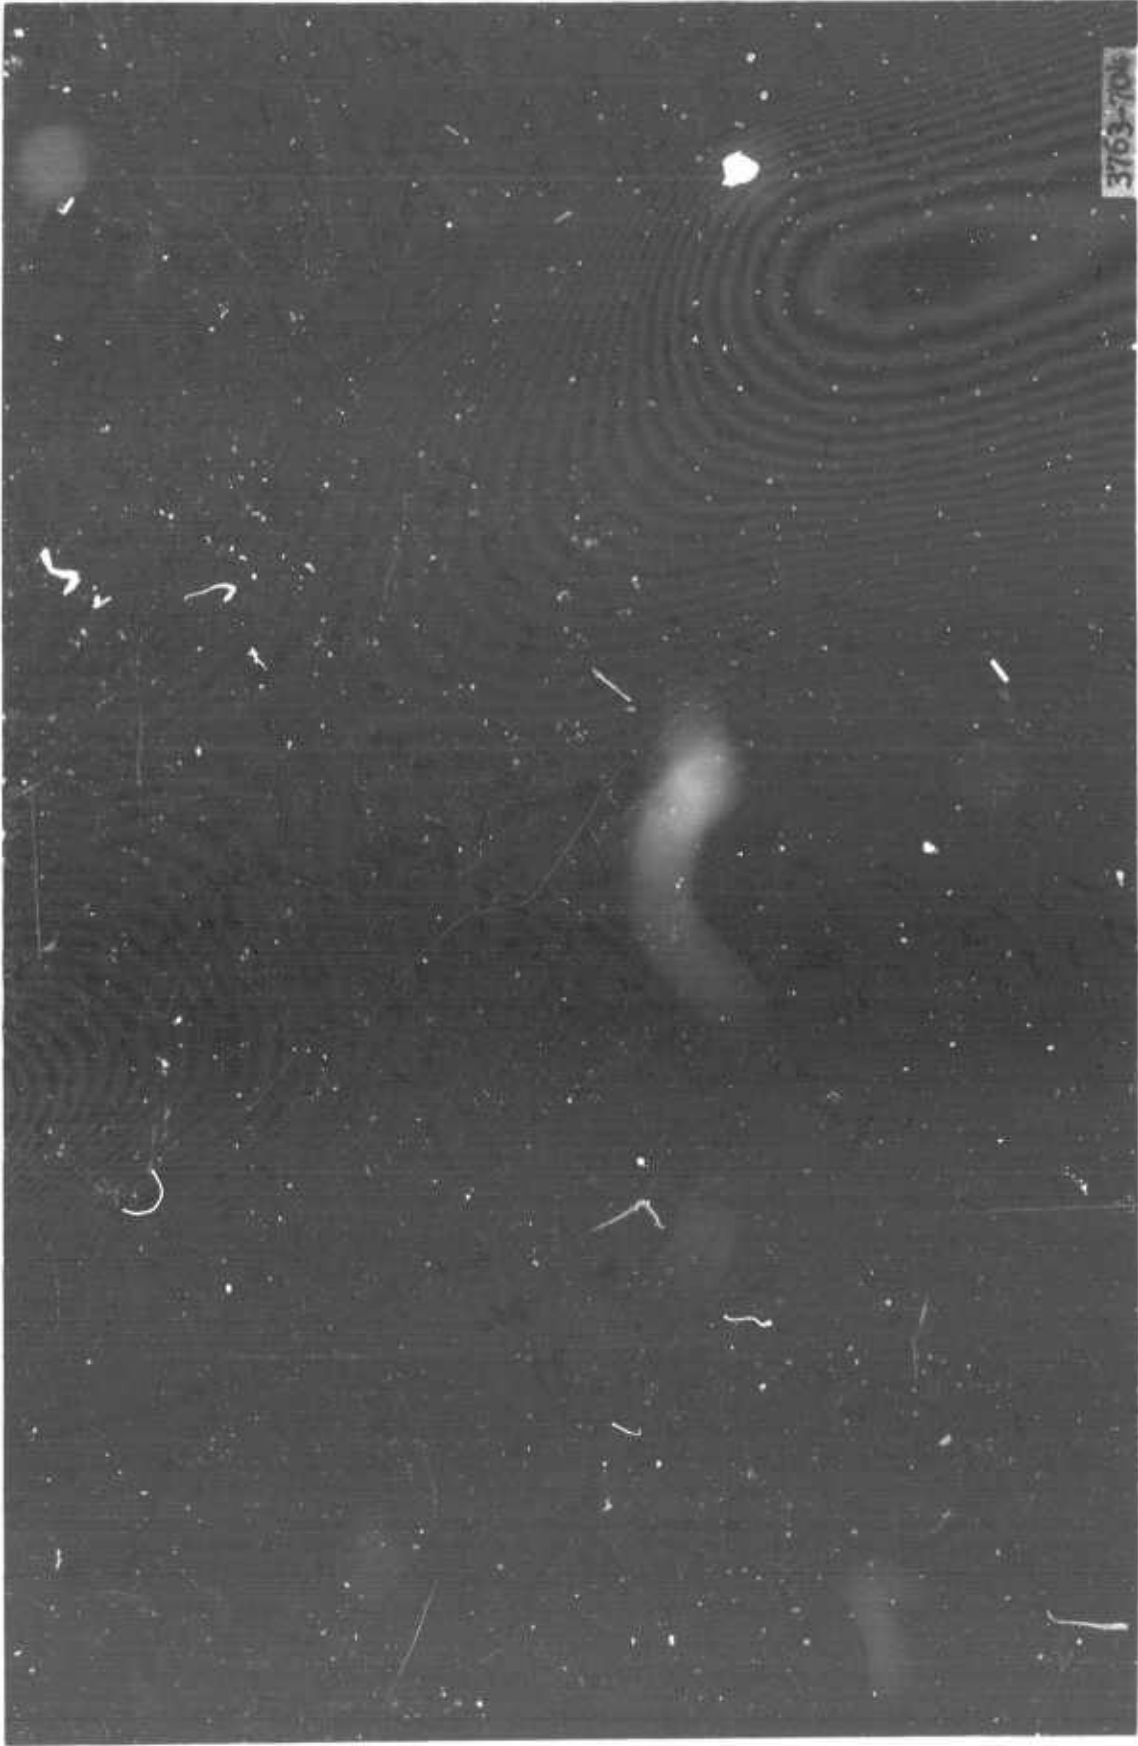


Figure 4. Lane 32, items 2 and 3, prior to traffic


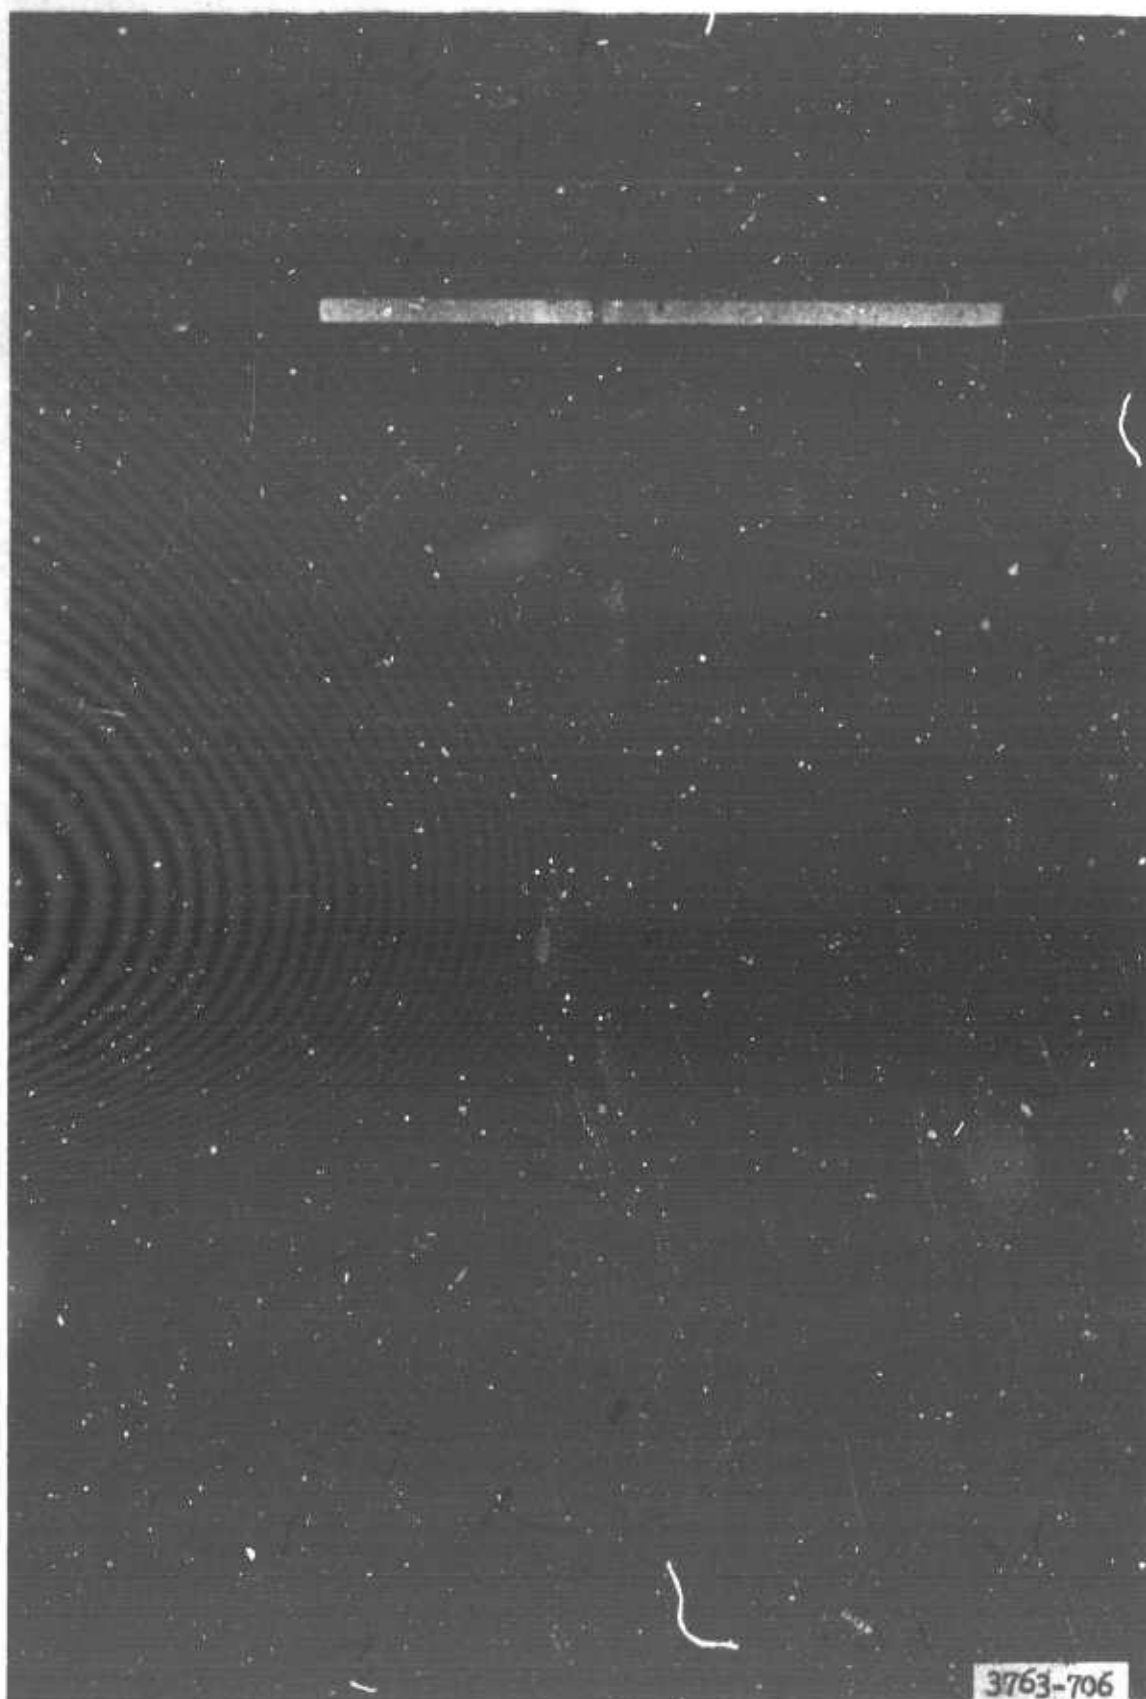


Figure 5. Lane 32, item 2, after 1 pass (failure)



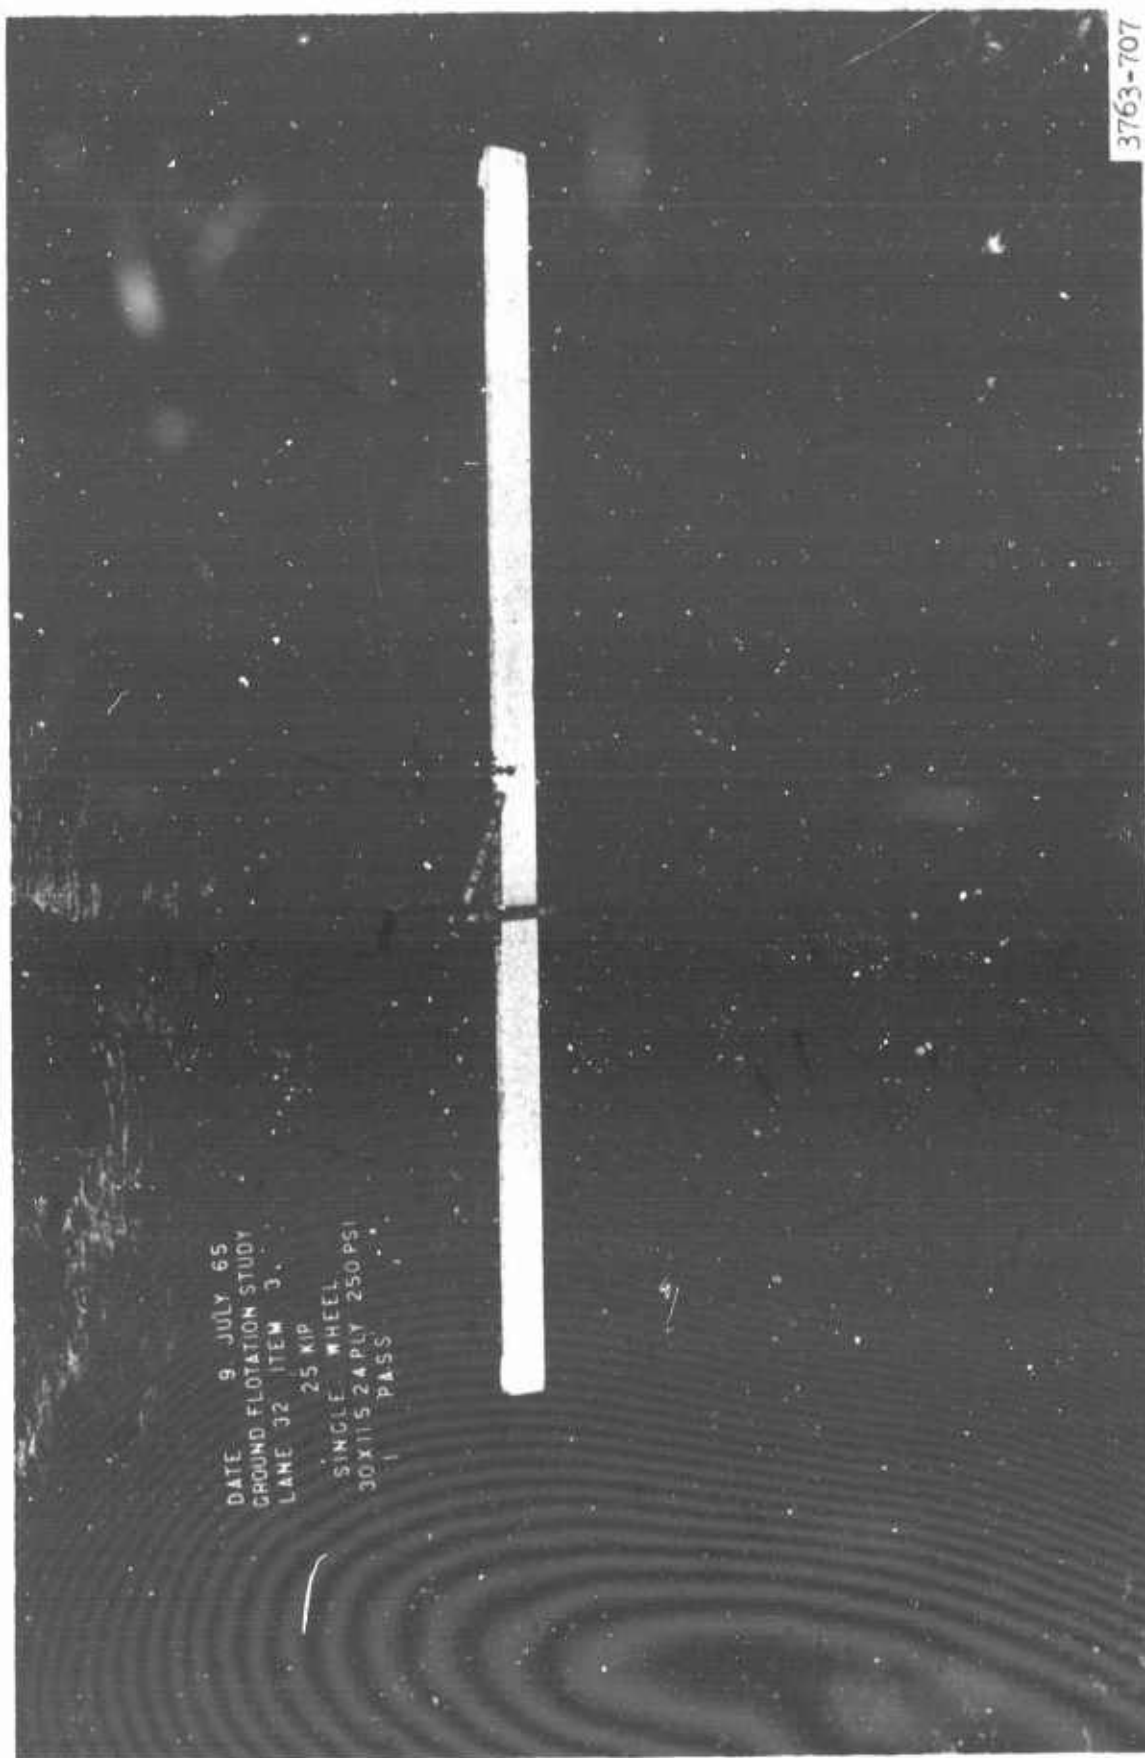

DATE 9 JULY 65  
GROUND FLOTATION STUDY  
LANE 32 ITEM 3  
25 KIP  
SINGLE WHEEL  
30X115 24PLY 250PSI  
PASS

3763-707

Figure 6. Lane 32, item 3, after 1 pass

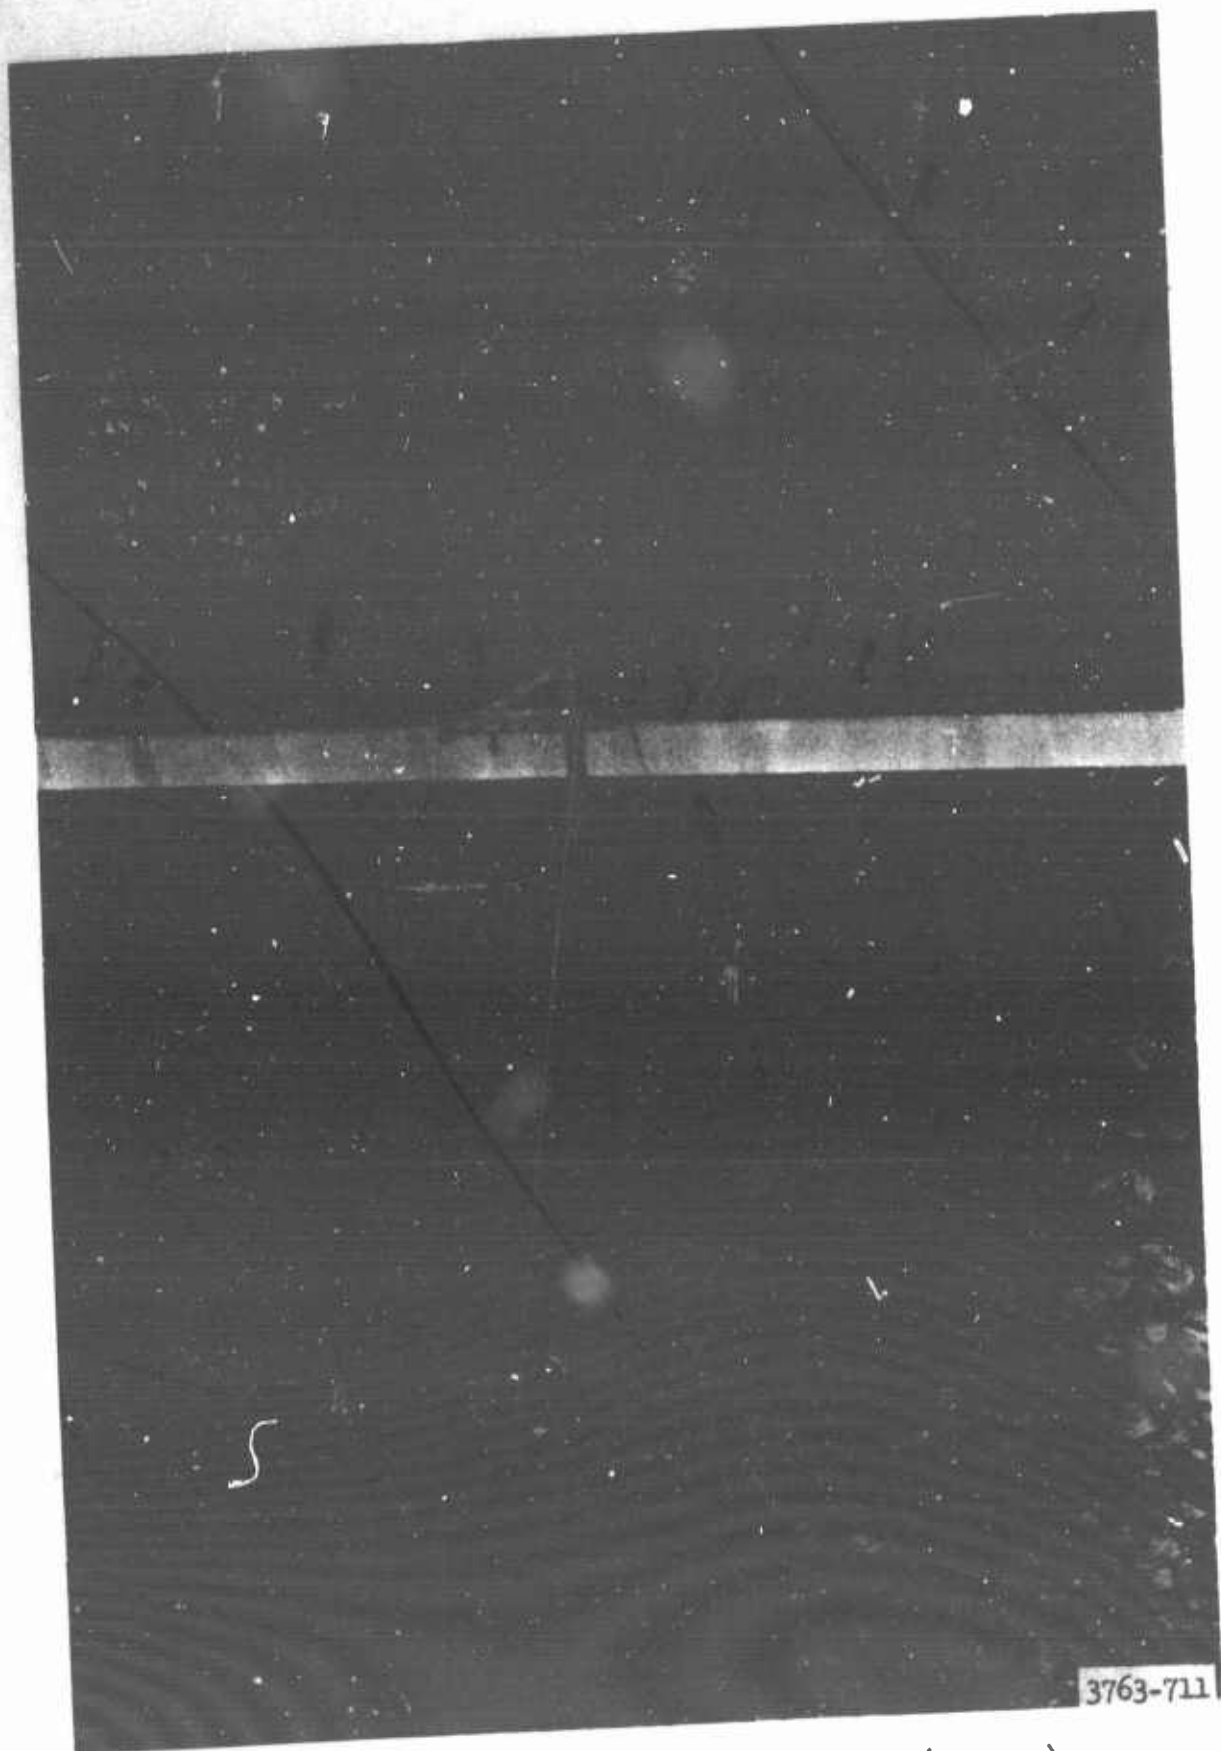


Figure 7. Lane 32, item 3, after 6 coverages (failure)

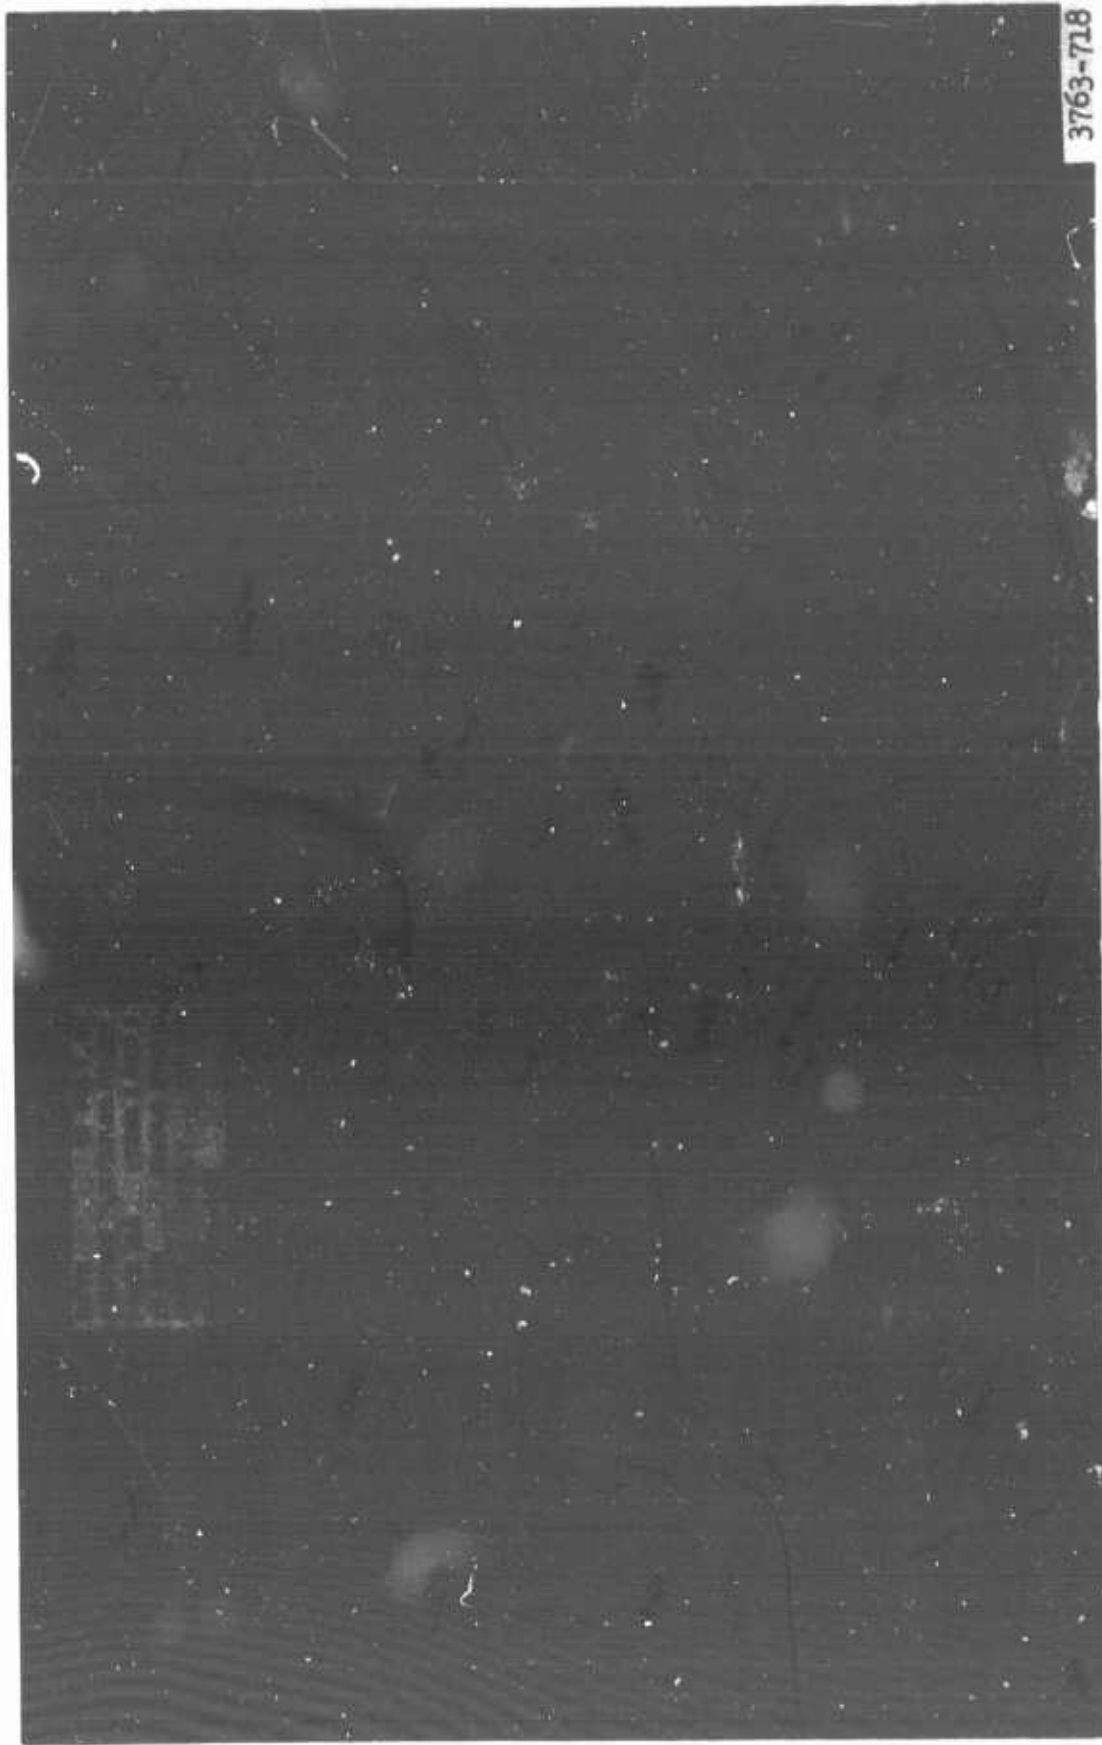


Figure 8. Lane 32A, items 2 and 3, prior to traffic

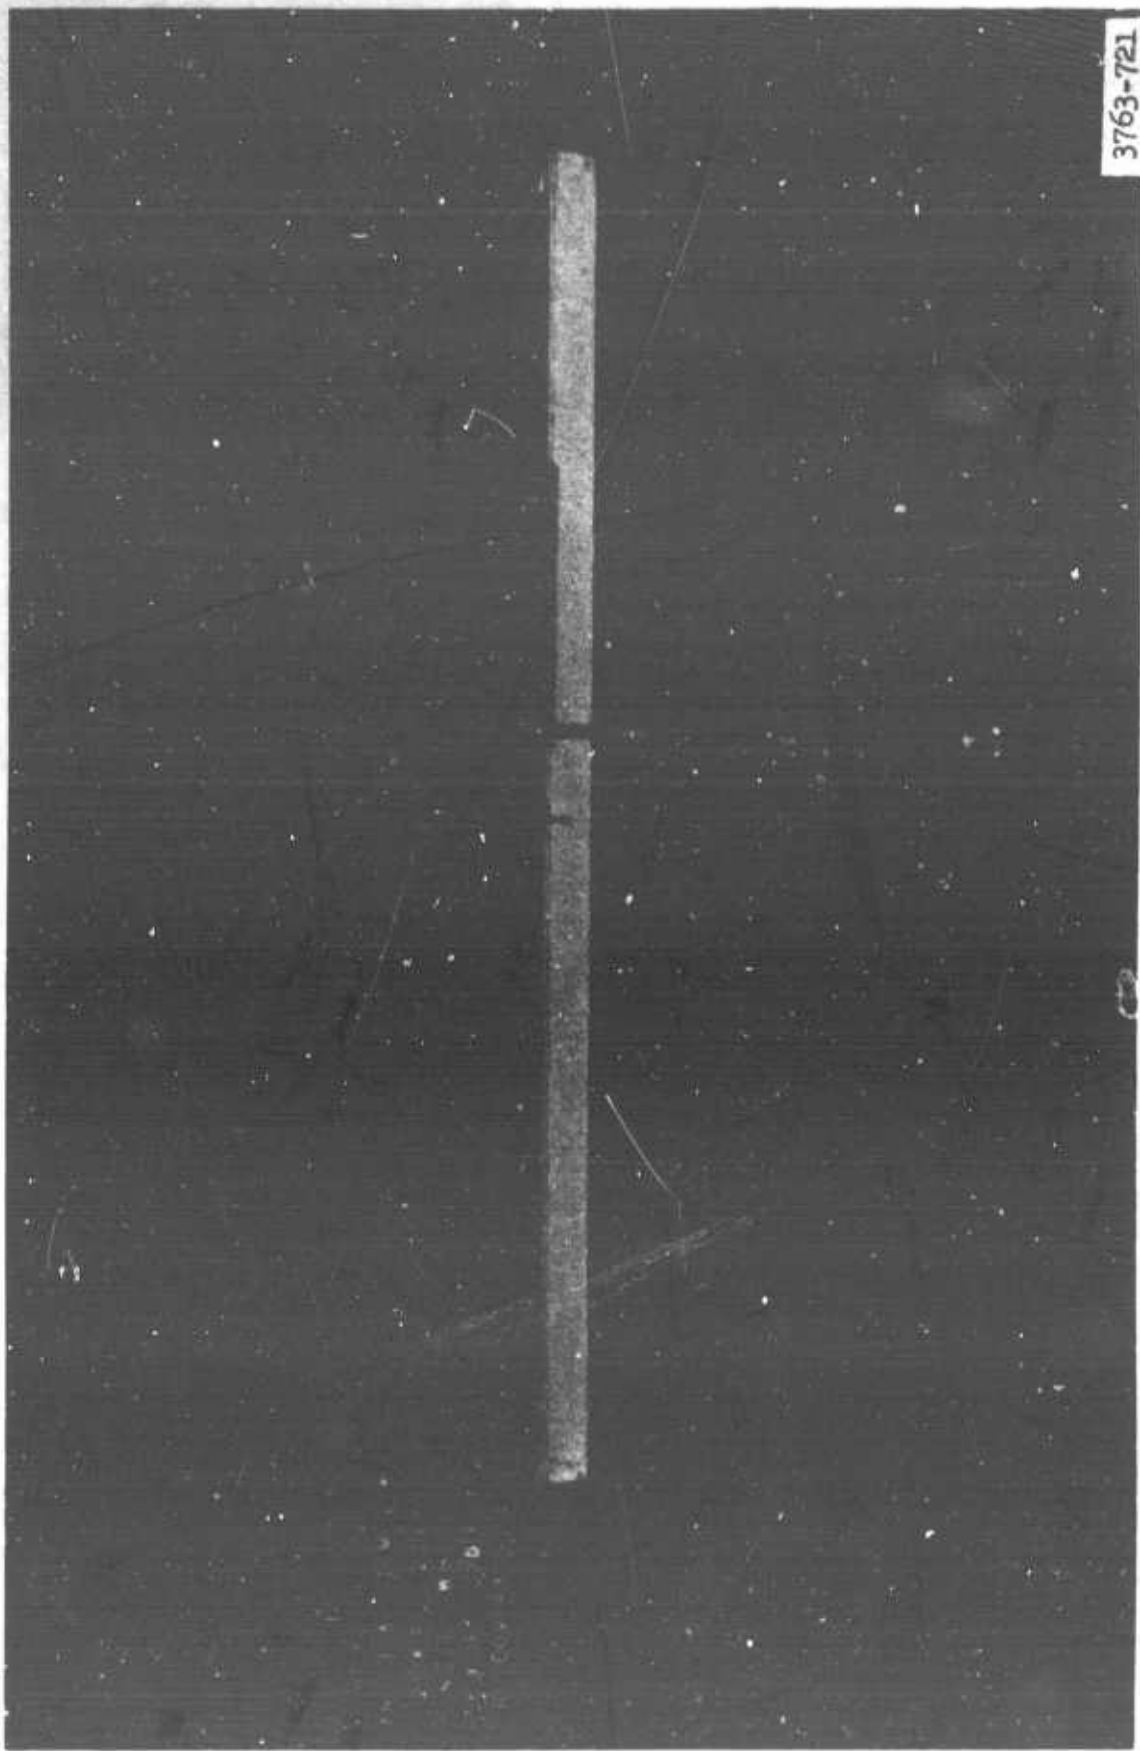


Figure 9. Lane 32A, item 2, after 10 coverages (failure)

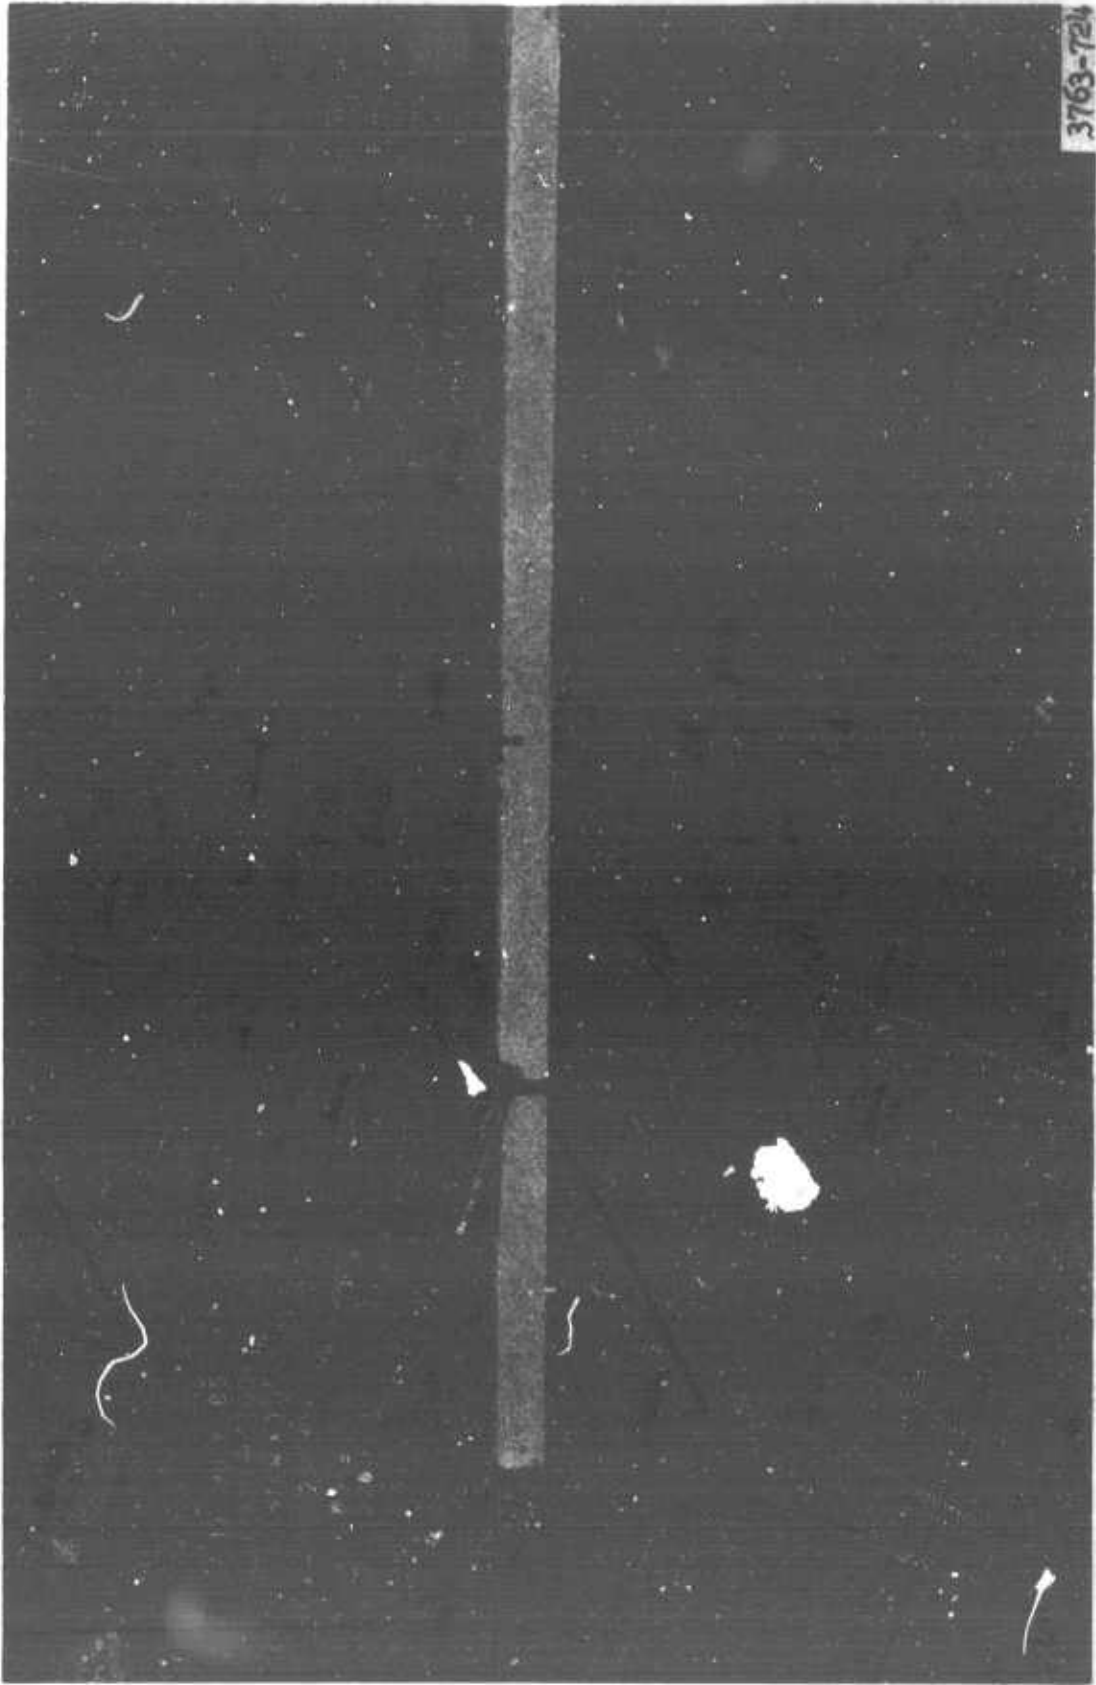


Figure 10. Lane 32A, item 3, after 60 coverages (failure)



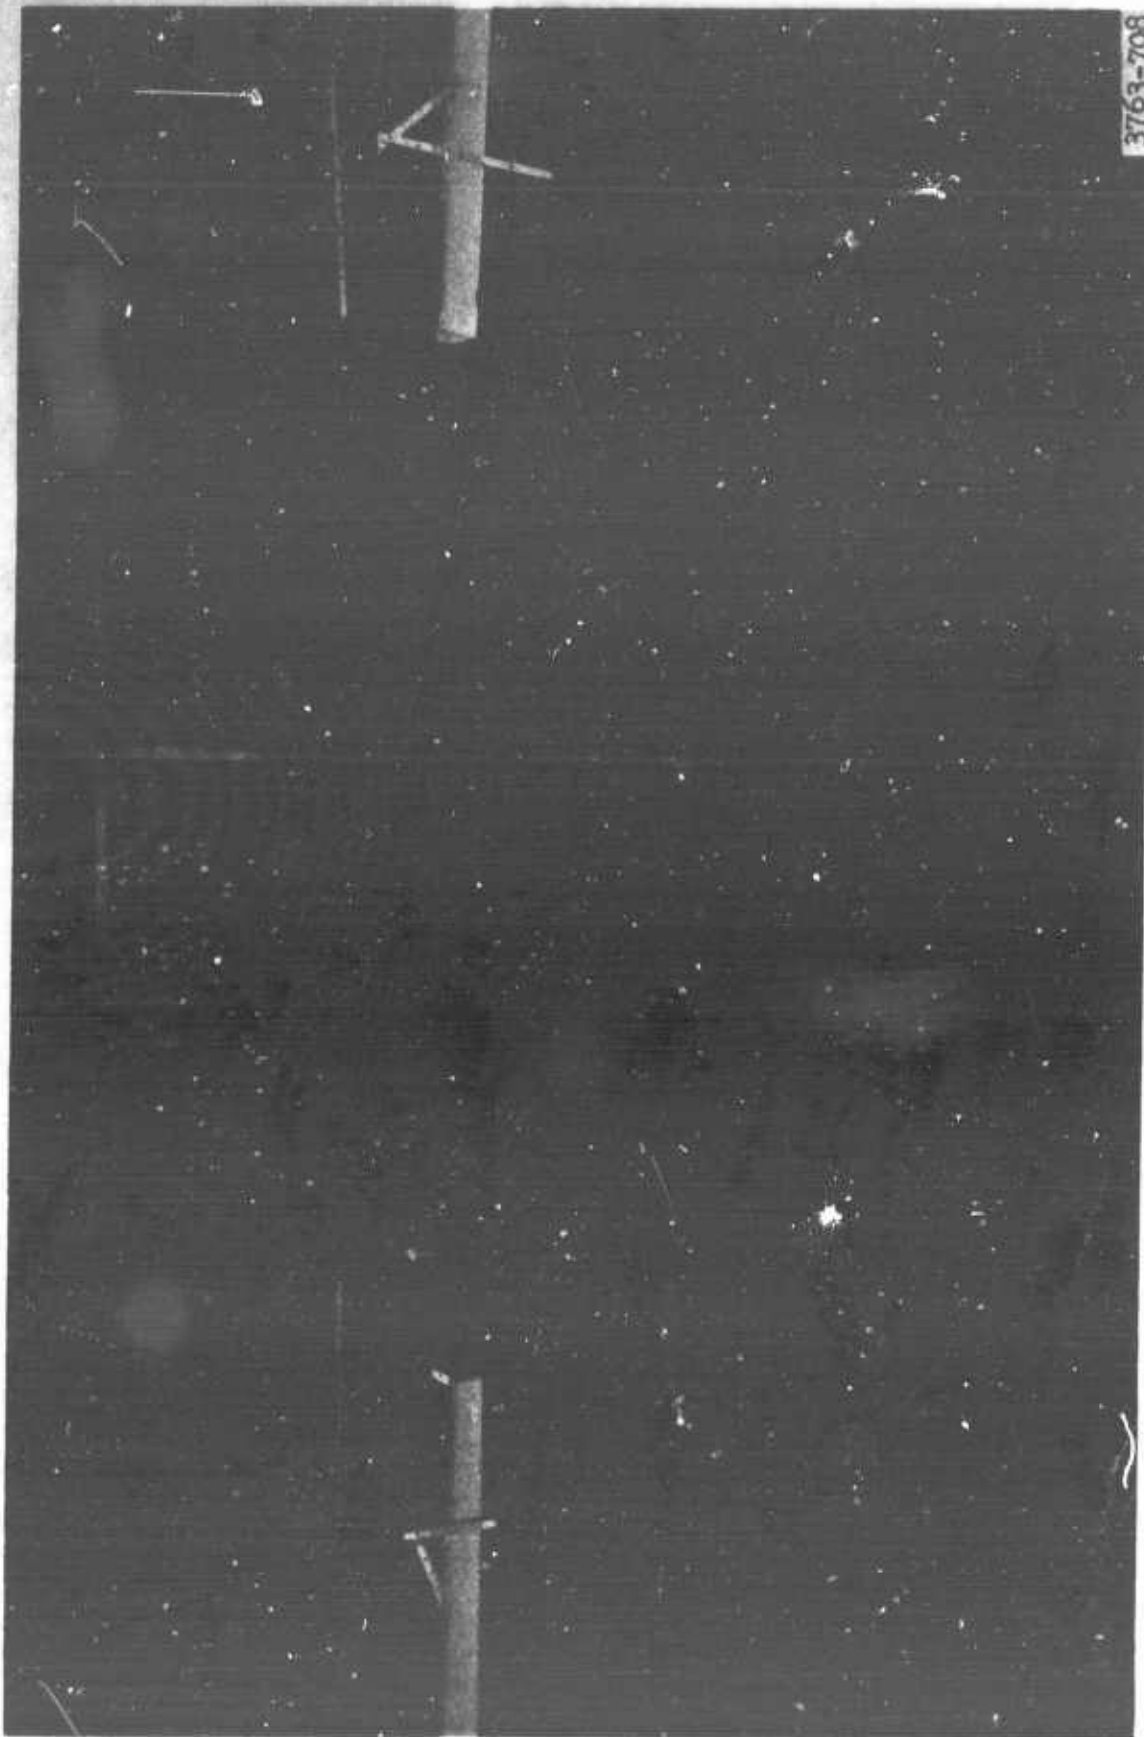


Figure 11. Rut depths resulting from different size tires  
(20x20, 22-ply tire and 30x11.5, 24-ply tire)


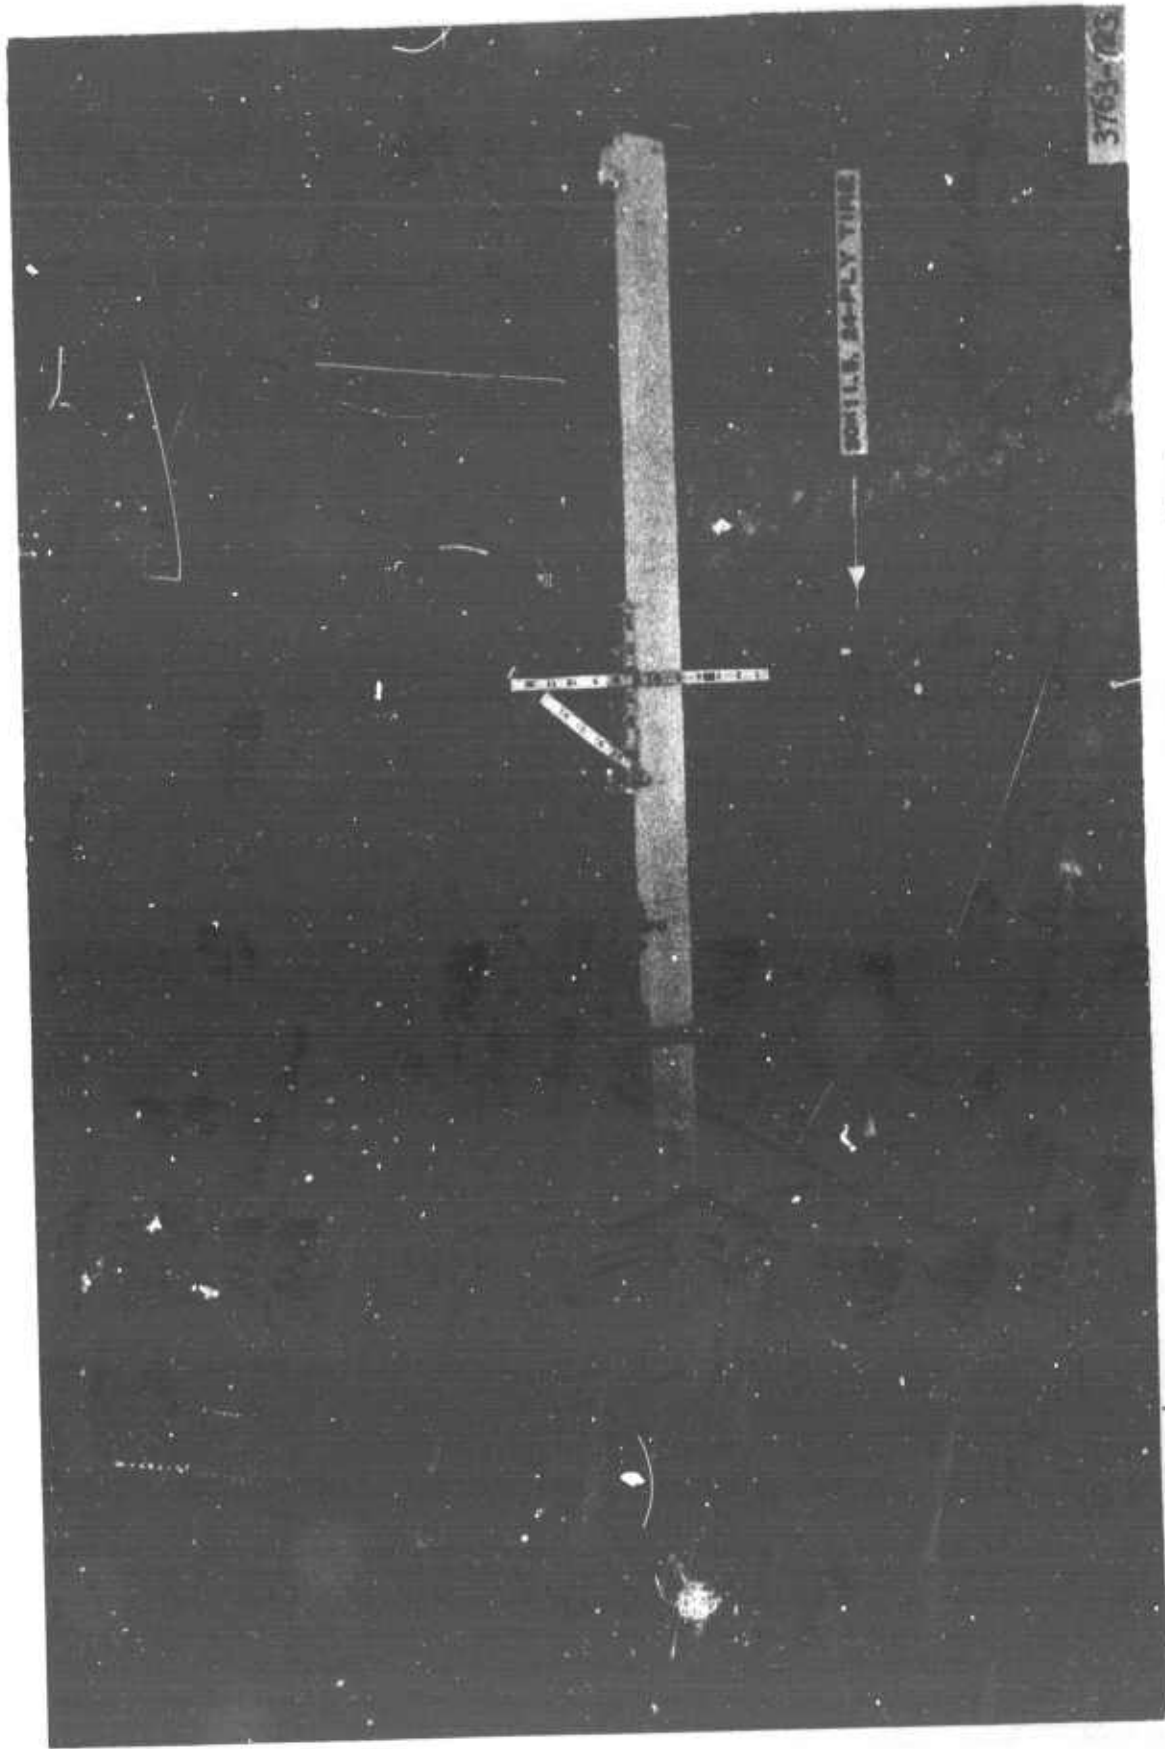



Figure 12. Rut depths resulting from different size tires  
(56x16, 32-ply tire and 30x11.5, 24-ply tire)



LAYOUT OF TEST SECTION 14A  
AND SUMMARY  
OF TEST RESULTS  
25-KIP, SINGLE-WHEEL LOAD  
250-PSI INFLATION PRESSURE


Figure 13

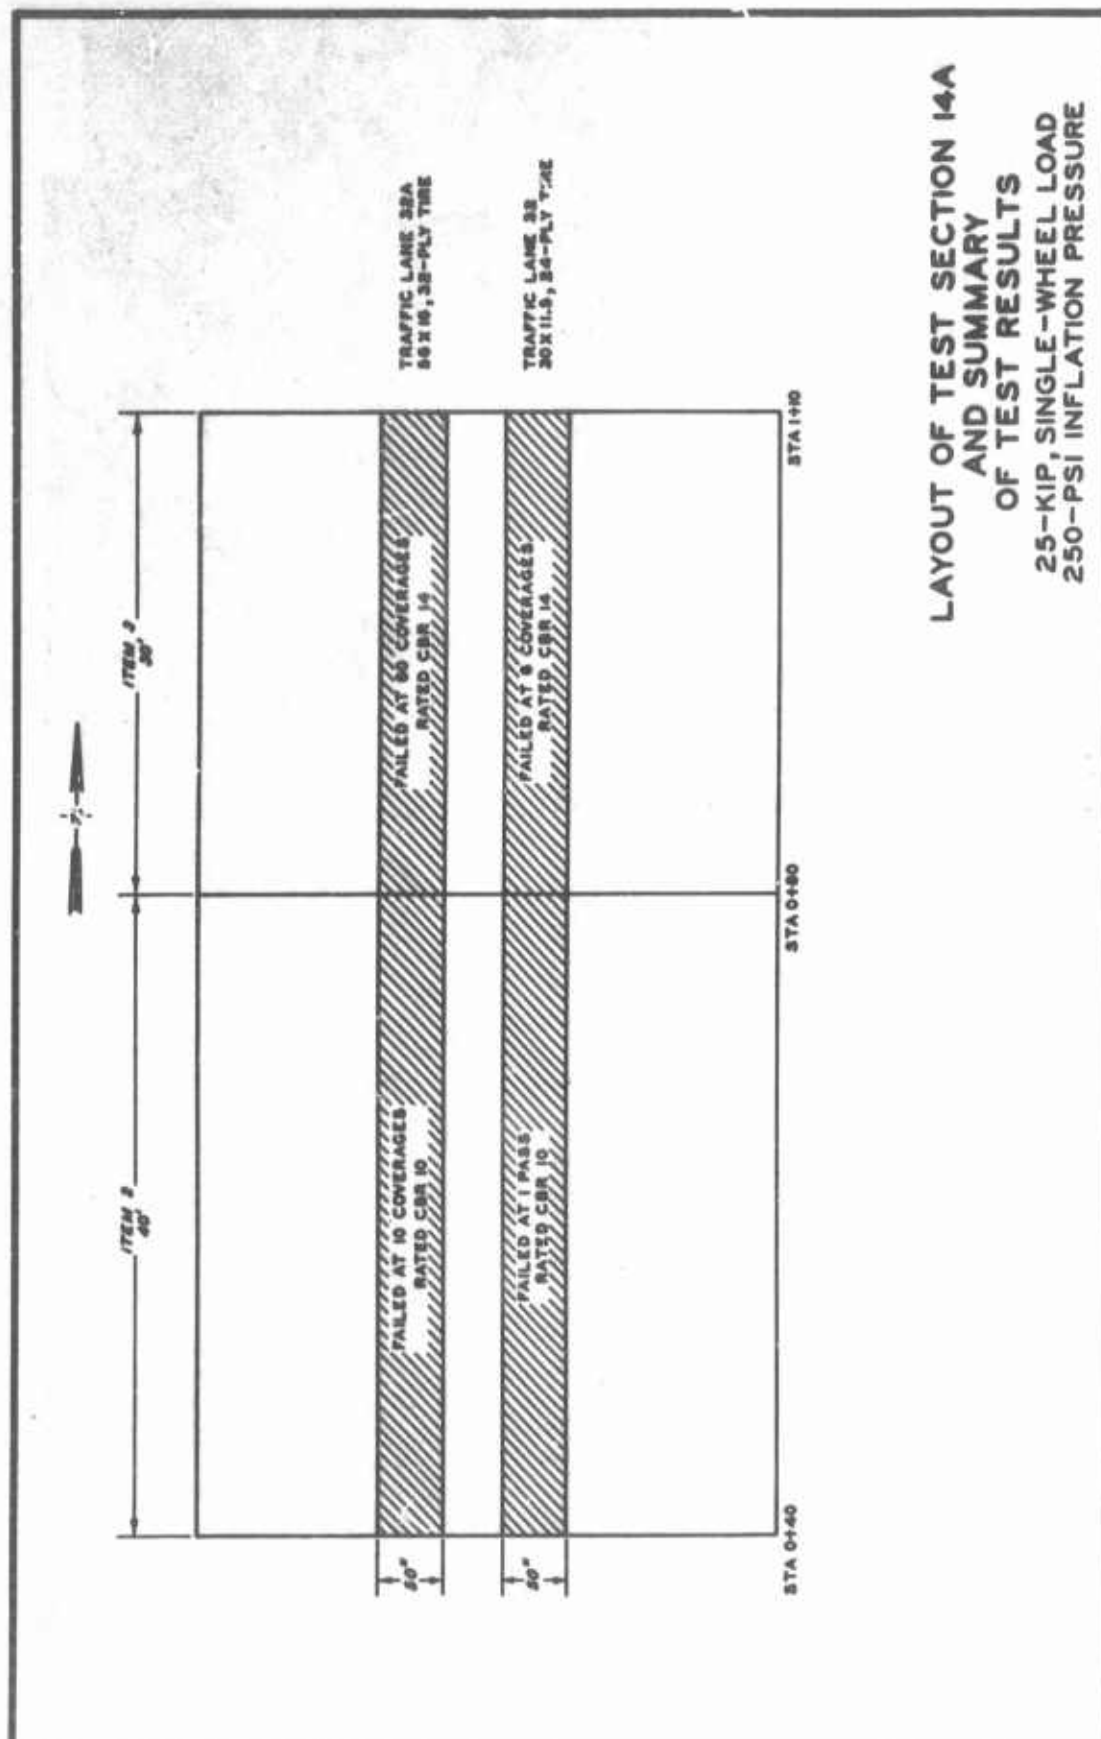

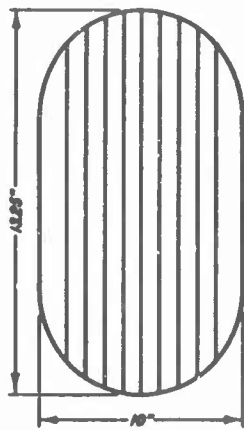

TIRE SIZE	30X11.5
NO. OF PLYS	24
CONTACT AREA, SQ IN.	110
CONTACT PRESSURE, PSI	220
INFLATION PRESSURE, PSI	220
DEFLECTION, %	27

LANE 32

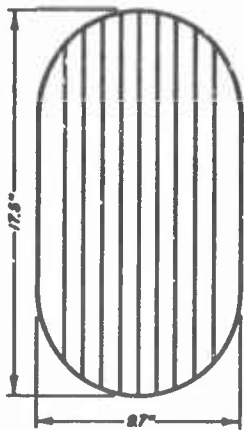

TIRE SIZE	30X16
NO. OF PLYS	32
CONTACT AREA, SQ IN.	141
CONTACT PRESSURE, PSI	177
INFLATION PRESSURE, PSI	250
DEFLECTION, %	16

LANE 32A

**TIRE-PRINT DIMENSIONS AND  
TIRE CHARACTERISTICS**  
TEST SECTION 14A  
LANES 32 AND 32A

Figure 14



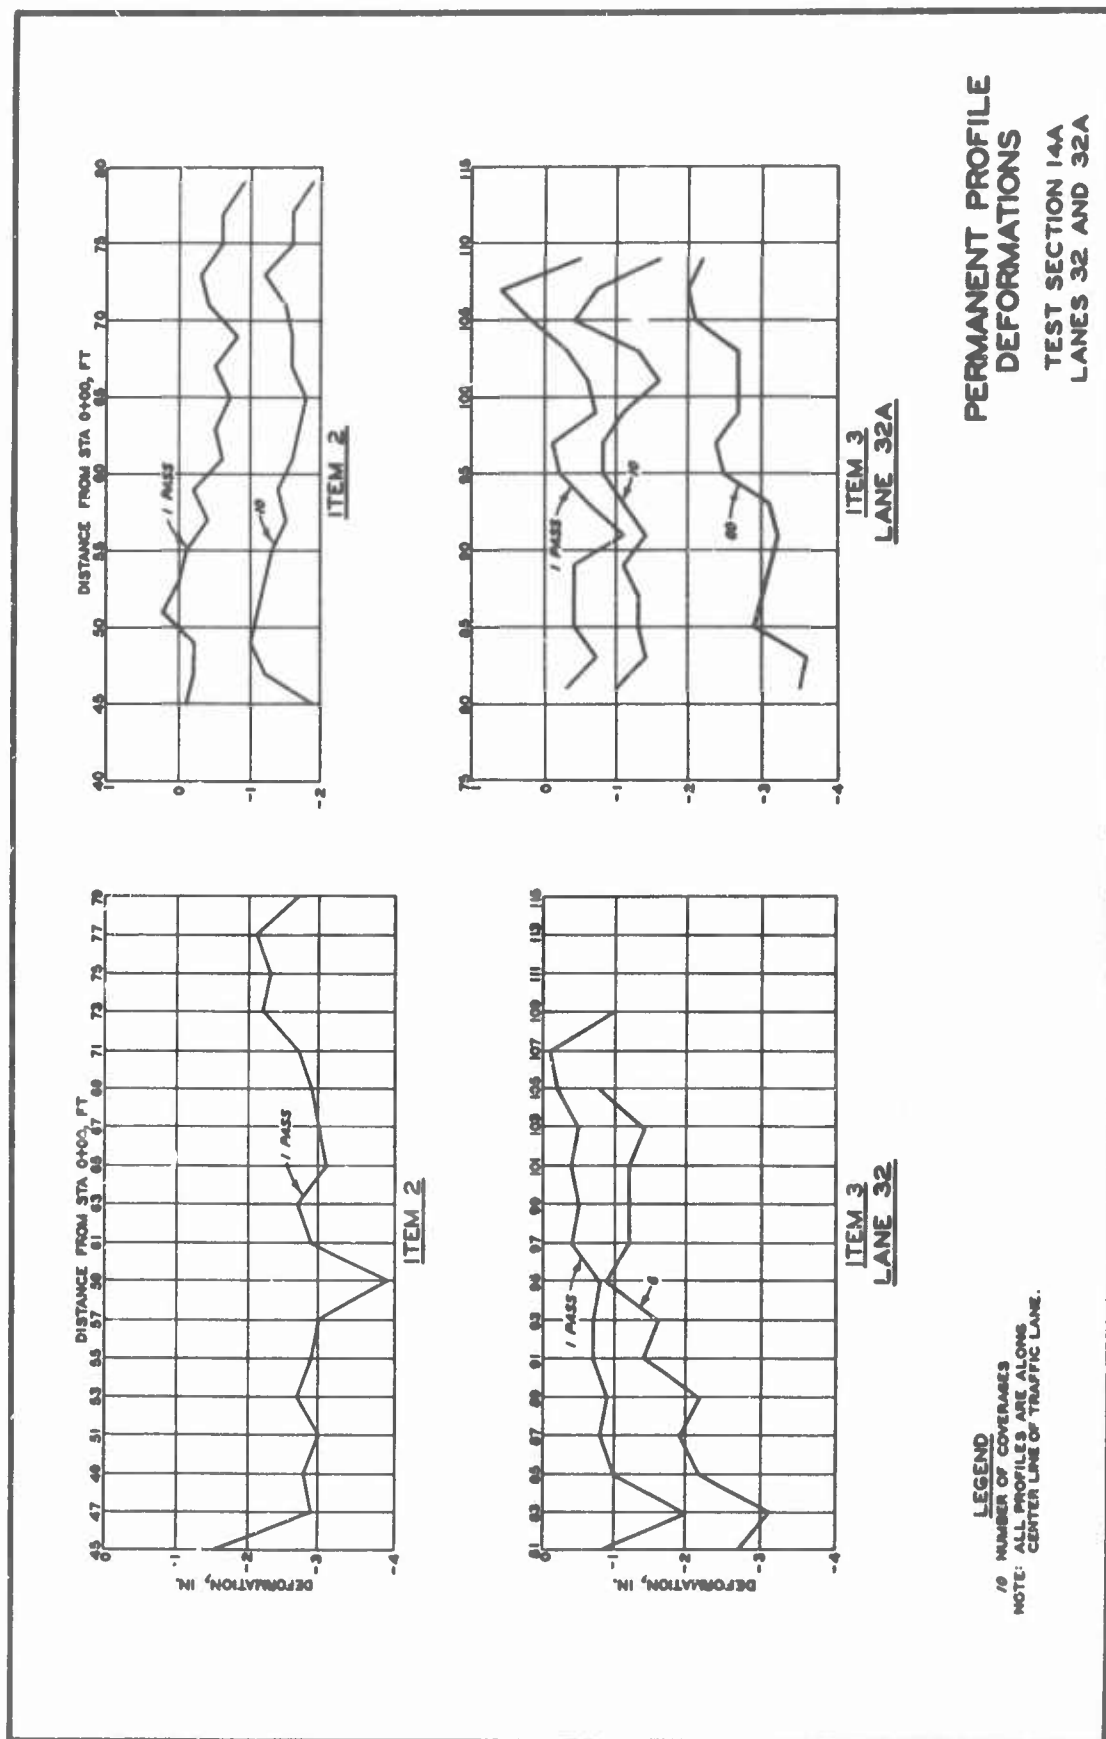


Figure 16

UNCLASSIFIED

Security Classification

## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) U. S. Army Engineer Waterways Experiment Station		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP	
3. REPORT TITLE Aircraft Ground-Flotation Investigation Part XV Data Report on Test Section 14A			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Technical Report			
5. AUTHOR(S) (Last name, first name, initial) Watkins, J. E. Hammit, G. M., II,			
6. REPORT DATE September 1966		7a. TOTAL NO. OF PAGES 25	7b. NO. OF REFS
8a. CONTRACT OR GRANT NO. MIPR AS-4-177		9a. ORIGINATOR'S REPORT NUMBER(S) AFFDL-TR-66-43, Part XV.	
b. PROJECT NO. 410A			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) None	
d.			
10. AVAILABILITY/LIMITATION NOTICES This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFM), Wright-Patterson AFB, Ohio 45433.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Air Force Flight Dynamics Laboratory Research and Technology Division AF Systems Command, WPAFB, Ohio	
13. ABSTRACT  This data report describes the results of work undertaken as part of an overall program to develop ground-flotation criteria for the C-5A aircraft.			

DD FORM 1473  
1 JAN 64

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Aircraft Ground Flotation Rolling Resistance Rear Area Airfields Support Area Airfields Forward Area Airfields Vehicle Mobility						

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Security Classification